

## ELETTROMAGNETI LINEARI STANDARD ELECTROMAGNETS

SERVIZIO INTERMITTENTE  
INTERMITTENT OPERATION



**K3i**



**K6i**



**K12i**




**K30i**

## MODELLI E DIMENSIONI TYPE AND SIZE

Modelli e dimensioni per servizio intermittente - Models and size for intermittent operation

Modello Type	Volt	Service Current	Dimensioni in mm. - Size of mm.									
			Ai	B	H	C max	D	E	F	G	I	L
K3i/12	12	23	70	Ø45	70	35	35	52	48	65	M6 X20	Ø6,5
K3i/24	24	8,5										
K6i/12	12	23	87	Ø60	82	45	50	70	65	85	M6 X20	Ø8,5
K6i/24	24	9										
K12i/12	12	19	96	Ø76	105	50	65	85	80	100	M6 X25	Ø8,5
K12i/24	24	9										
K30i/12	12	21,5	105	Ø102	100	50	75	95	105	120	M8 X30	Ø8,5
K30i/24	24	12,5										

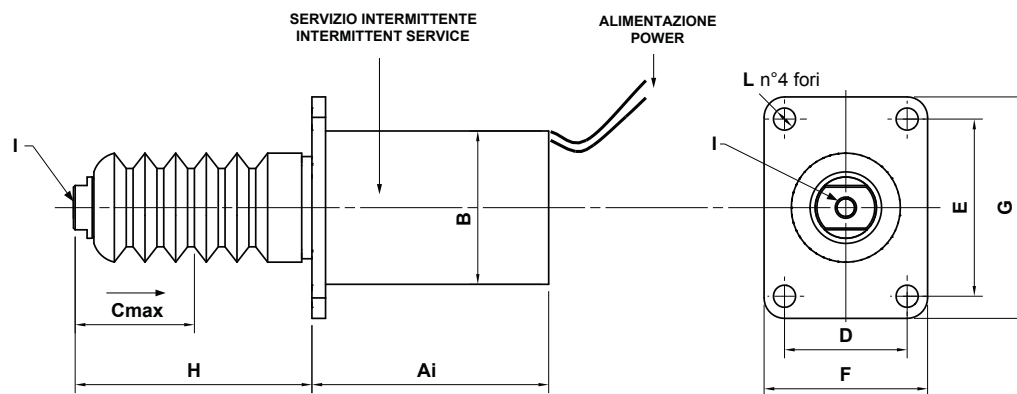

## FORZA PER SERVIZIO INTERMITTENTE FORCE FOR INTERMITTENT OPERATION

