

## ELETTROMAGNETI LINEARI STANDARD ELECTROMAGNETS

SERVIZIO INTERMITTENTE  
INTERMITTENT OPERATION



**K3i/P**




**K3i24prts**



## MODELLI E DIMENSIONI TYPE AND SIZE

Modelli e dimensioni per servizio intermittente - Models and size for intermittent operation

Modello Type	Volt	Service Current	Dimensioni in mm. - Size of mm.											
			Ai	B	H	C max	D	E	F	G	I	L	M	N
K3i/12P	12	9	54	Ø45	68	28	36	52	48	65	M6 X20	Ø6,5	-	-
K3i/24P	24	4												
K3i/12PRTS	12	9,4	53	Ø45	39	10,5	36	52	48	65	M6 X20	Ø6,5	M6	17
K3i/24PRTS	24	4,5												

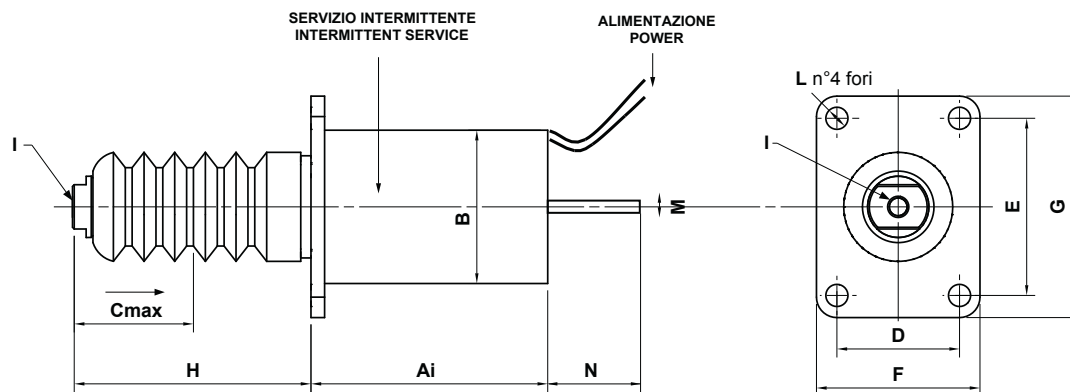

## FORZA PER SERVIZIO INTERMITTENTE FORCE FOR INTERMITTENT OPERATION

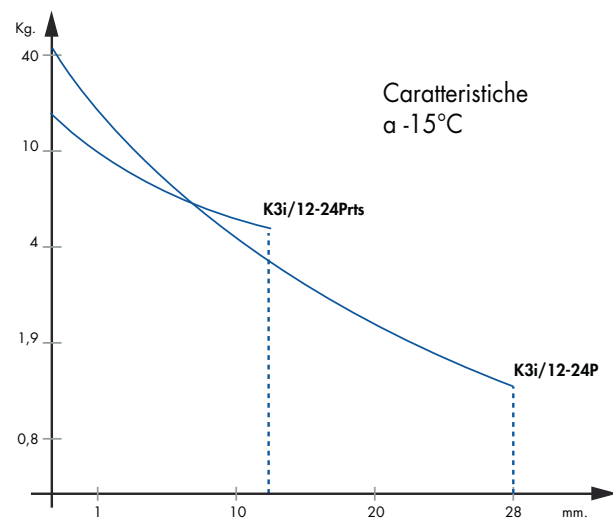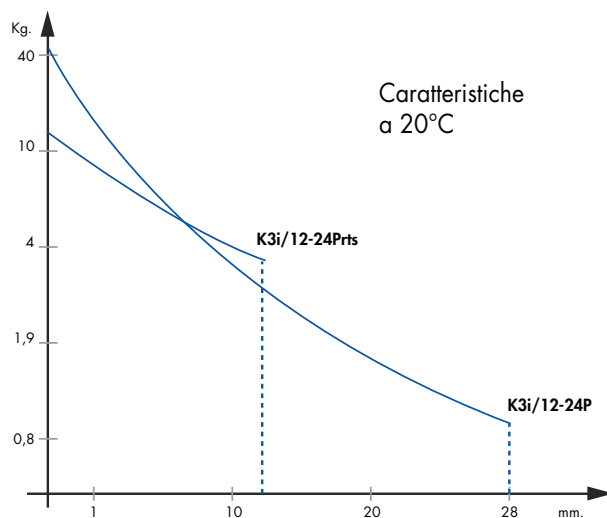

**CABEF**

[www.cabef.com](http://www.cabef.com) - [info@cabef.com](mailto:info@cabef.com)

Viale del Lavoro, 24 - 60030 Castelfellino (AN) ITALY - Tel. +39 0731 56711 - Fax +39 0731 219021